

#### **GEN-6214F**

**Analog Ceiling Speaker** 

\_


GEN-6214F is a full-range, low-impedance ceiling speaker that can be used in conjunction with the GEN-6214A01 network ceiling speaker. It delivers clear sound with high fidelity, making it especially suitable for hotels, retail stores, and similar environments.

Ceiling

### **SPECIFICATION**


Frequency Response	180-20KHz
Sensitivity	90dB±3dB
Rated Power	6W
Rated Impedance	8Ω
Panel Material	ABS
Net Material	Aluminum Mesh
Speaker Unit	6"Full-Range Speaker
Finished Colour	White
Weight	820g
Hole for mounting	φ170 (mounting hole) * 50 (maximum ceiling thickness) mm
Dimension(mm)	φ180*110 mm
Operatiing Temperature	-10°C~+50°C
Warranty	2 Years

# **INTERFACE DESCRIPTION**

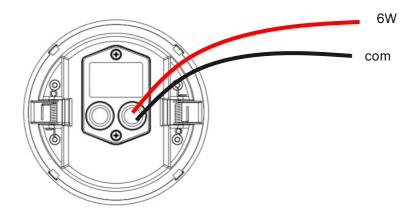


# **APPLICATION**


The GEN 6214F analog ceiling speaker, rated at 6W and 8 ohms, can be connected to the GEN-6214A01 network ceiling speaker for sound expansion and amplification.

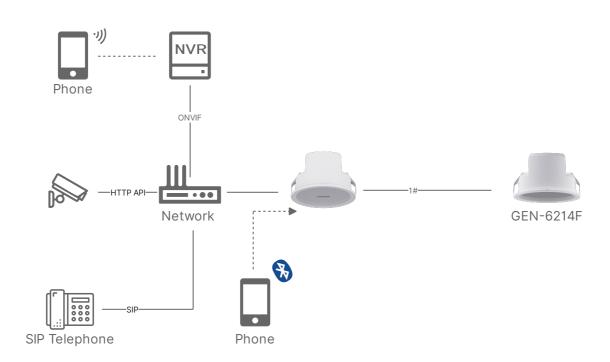

# **INSTALLATION**

unit:mm

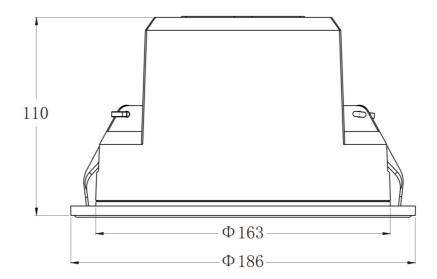

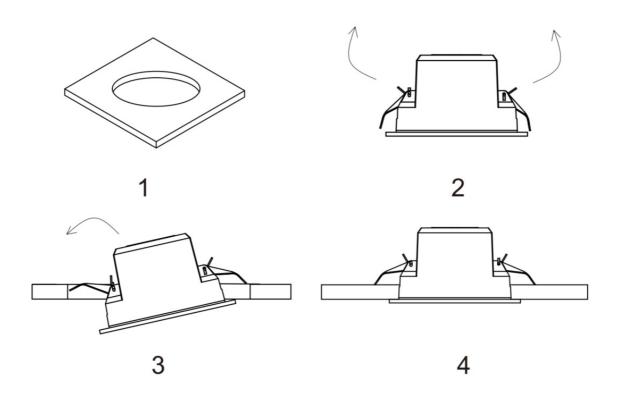





Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. Mobile: +86 138 7314 3517

**Email:** inquiry@sponcomm.com **Tel:** +86 731 8557 0190